


Sunmodule®

SolarWorld Module SW 200/210/220 poly

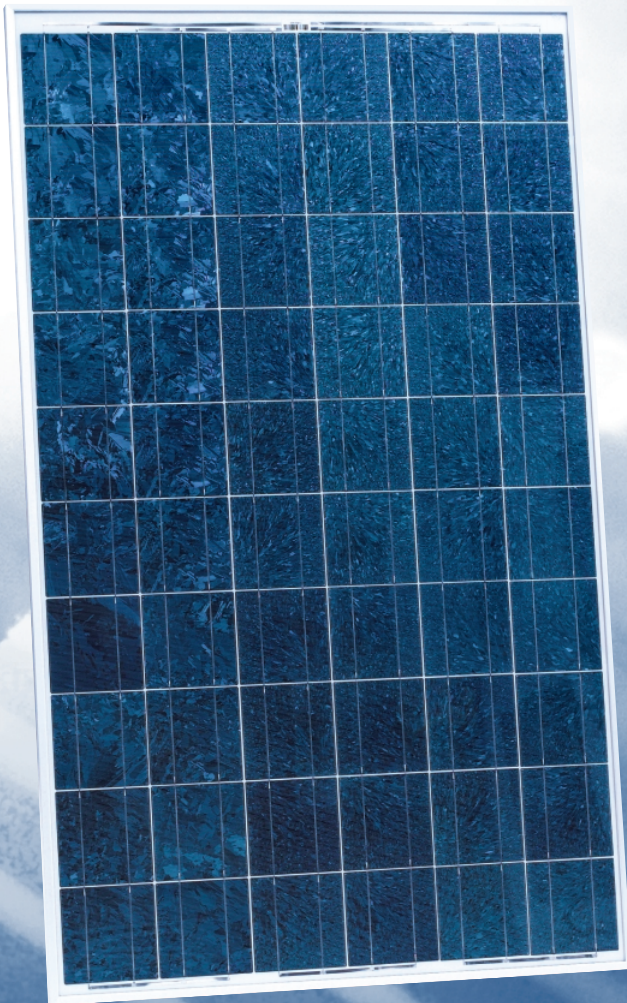

The Sunmodule® SW 200/210/220 poly by SolarWorld offers an innovative module concept. The unique, fully automated production process ensures the highest level of precision and consistently high production quality. The machine finishing produces a highly homogeneous design.

The polycrystalline 6" cells lie behind a 4 mm hardened-glass glazing and are embedded in transparent EVA (ethylene-vinyl-acetate). The back of the module is sealed with a very high quality Tedlar film. The module stability is the result of the deep inset of the glass in the frame and its continuous bond between the two.

The flat and compact connecting socket is mounted on the back of the module using a unique, patented process. The connecting socket has no hollow cavities, is water-tight, resistant to UV radiation and microbes, as well as very temperature resistant. This flat and compact top-quality product represents the ideal solution for every application.

	Module
Length:	1675 mm
Width:	1001 mm
Height:	34 mm
Frame:	Aluminium
Weight:	22 kg

Edition: January 2006




SolarWorld AG
Kurt-Schumacher-Straße 12-14
53113 Bonn/Germany
Tel.: +49-228-55920-0
E-Mail: service@solarworld.de
www.solarworld.de



SolarWorld Module SW 200/210/220 poly

Design



- 1] Front: tempered glass
- 2] 60 polycrystalline solar cells
156 mm x 156 mm embedded
in EVA (ethylene-vinyl-acetate)
- 3] Rear: Tedlar foil

Performance under standard test conditions (STC)

	200 Wp	210 Wp	220 Wp
Peak power (Pmax)	200 Wp	210 Wp	220 Wp
Maximum power point voltage (Vmpp)	28.6 V	29.2 V	29.8 V
Maximum power point current (Impp)	7.0 A	7.2 A	7.4 A
Open circuit voltage (Voc)	36.2 V	36.4 V	36.6 V
Short circuit current (Isc)	7.6 A	7.8 A	8.0 A

Performance at 800 W/m², NOCT, AM 1.5

	150 Wp	157 Wp	165 Wp
Peak power (Pmax)	150 Wp	157 Wp	165 Wp
Maximum power point voltage (Vmpp)	26.5 V	27.1 V	27.6 V
Maximum power point current (Impp)	5.7 A	5.8 A	6.0 A
Open circuit voltage (Voc)	33.6 V	33.7 V	33.9 V
Short circuit current (Isc)	6.1 A	6.3 A	6.4 A

Minor reduction in efficiency under partial load conditions at 25°C: at 200 W/m², 95 % (+/- 3 %) of the STC efficiency (1000 W/m²) is achieved.

Component materials

Cells per module	60
Solar cells	polycrystalline silicon
Cell dimensions	156 x 156 mm

Thermal characteristics

NOCT	46°C
TK Isc	0.08 %/K
TK Voc	-0.33 %/K

System design characteristics


Maximum system voltage	1000 V
Reverse current load	Do not apply external voltages in excess of Voc to the module.

Rated power and maximum tolerance


Rated power	200/210/220 Wp +/- 3 %
Connecting socket	IP 65
Plug	MC type 4

front view

rear view

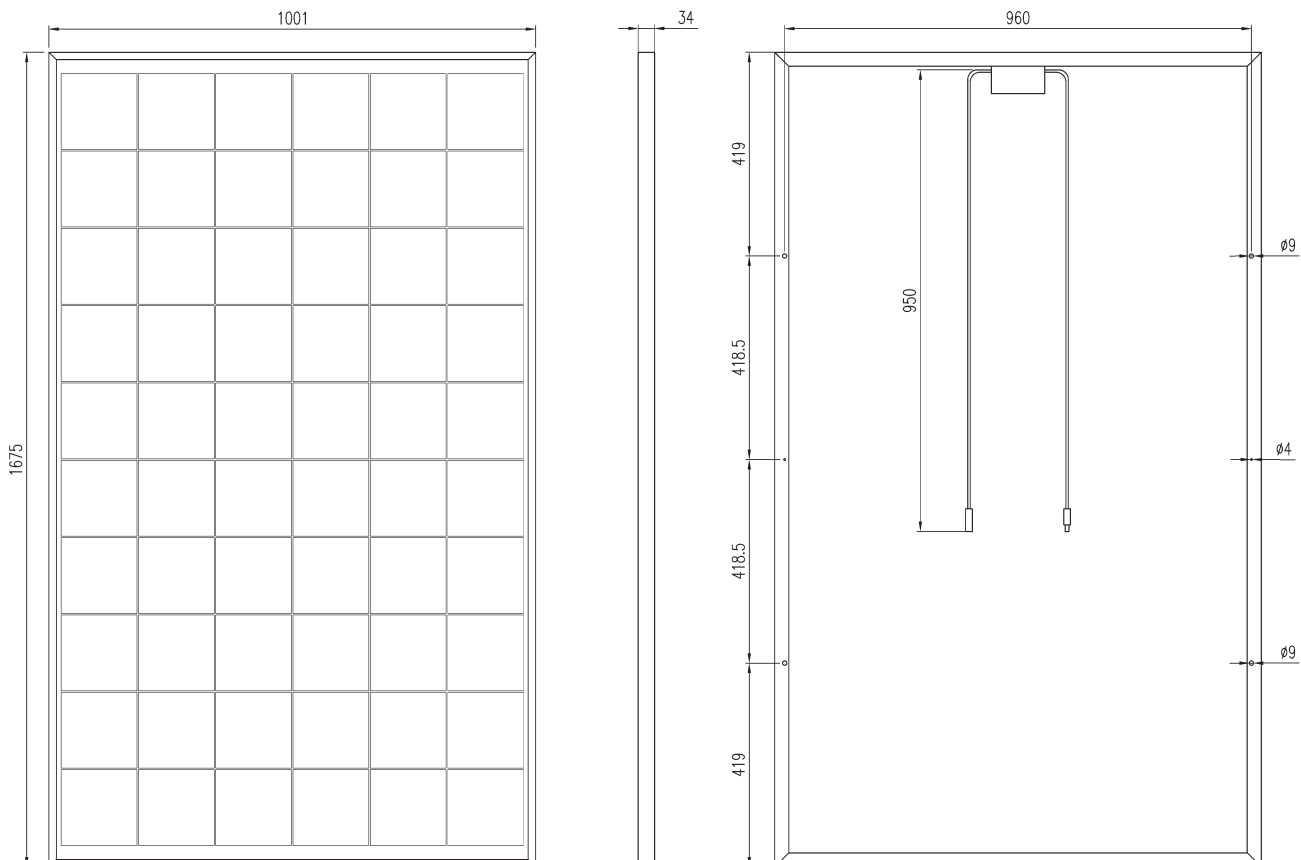

Modules certified according to:



SolarWorld AG reserves the right to make specification changes.
This data sheet complies with the requirements of EN 50380.
This data sheet is also available in german language.